

VP200HD(i)



VP250HD(i)



Interactive amplified audio/video player on SD/SDHC card or USB key

Post your audio/video files from SD/SDHC card or internal / external USB key.

The player can run videos in all types of contexts without the use of computer hardware.


Easy -to-use, your project comes alive in few minutes.

With the trigger inputs, the video selected is launched, for an interactive video experience. Connecting a push-button, a motion sensor, a door contact or any kind of sensor, you will trigger video broadcast according to external events .

Using the Mosfet output (electronic switch output), you can switch on/off lights, activate a motor or any type of electrical device.

Extended features are available on the VP250HD(i), an ethernet connection allows users of the VP250HD to update the content of the player from any computer system.


Its 2x14w built-in amplifier can be directly connected to speakers.

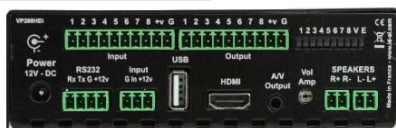

VP200HDi



VP250HDi

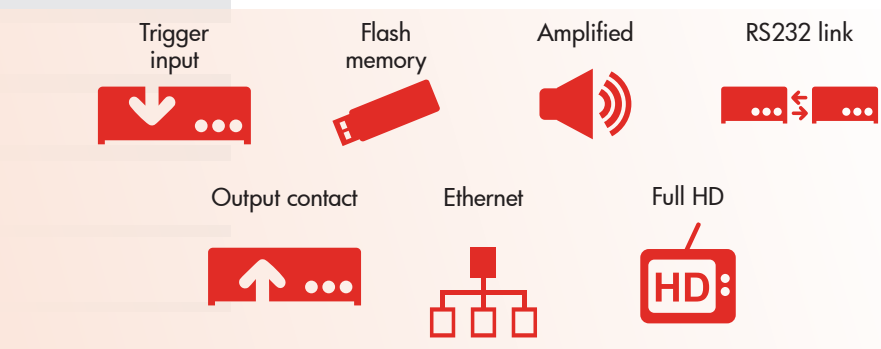

	VP200HD	VP200HDi	VP250HD	VP250HDi
Ethernet	-	-	Yes / FTP	Yes / FTP
Medias	USB	USB	USB / SD / SATA	USB / SD / SATA
Trigger input	1	1 + 8	1	1 + 8
Output	-	8	1	1 + 8
VGA output	-	-	Yes	Yes

Some examples of use:

- High quality interactive video displays in museums, exhibitions, art galleries...
- Information kiosks in public places, tourist offices, waiting halls, shopping malls...
- Interactive video desks in theme parks, leisure centers, zoos...
- Point of sale advertising in shops and shop windows.
- Property video presentation for estate agents.
- Attractive interactive video catalogue for tour operators and travel agents.
- To generate special video effects in castles haunted houses, merry-go-rounds...

SPECIFICATIONS :

- Reads file format :
 - Video : MPEG-2 TS/TP / MPEG-4 / MOV H.264
 - Still pictures : Jpeg, PNG
 - Audio : MP3, Wav, AAC, AC3
- Video output :
 - SD 720x576 25i/25p (576p / 576i) (4:3/ 16:9)
 - SD 720x480 30i/30p (480p/480i) (4:3/16:9)
 - HD 1280x720 25i/p, 30i/p, 50i/p, 60i/p, 24p(720p)
 - HD 1920x1080 25i/p, 30i/p, 50i/p, 60i/p, 24p (1080i / 1080p)
 - Résolution : SD PAL, SD 576p, SD NTSC, SD 480p, HD 720p, Full HD 1080i, Full HD 1080p
- Media :
 - External USB key (on the front face)
 - Internal USB key - VP250HD(i)
 - SD/SDHC SD card - VP250HD(i)
- RS232 link to control the player
- Ethernet / FTP - VP250HD(i)
- Infrared sensor (remote control)
- Connectics :
 - Video : HDMI / VGA - VP250HD(i)
 - Audio/vidéo composite : Mini Jack 4 pins
 - Ethernet : RJ45 - VP250HD(i)
 - Amplifier : 2x14W - 8Ohms - Terminal block
 - Trigger input : Terminal block
 - Contact output : Mosfet 500mA - Terminal block - VP250HD(i)
 - RS232 in/out : Terminal block
- Power supply : 12V (supplied)